



Technology Sheet

TD-Diver

Technical Specifications

Length 110 mm

Diameter 22 mm

Weight 104 g

Memory 72,000 measurements with backup;

continuous and fixed length memory

Wetted parts

housing stainless steel (316L)

o-rings Viton®

pressure sensor piezo resistive ceramic (Al₂O₃) with thermal compensation

cap Nylon PA6 30% glass fiber

nose cone ABS

Battery life up to 10 years (dependent on usage)

Sample interval ½ second to 99 hours

Sample method fixed interval

Communication RS232

Pressure

Part number	DI 801	DI 802	DI 805	DI 810	
Range	10	20	50	100	mH_2O
Accuracy ⁺	± 0.5	± 1.0	± 2.5	± 5.0	cmH_2O
Resolution	0.06	0.09	0.19	0.36	cmH_2O

Temperature

Range $-20 \text{ to } 80 \,^{\circ}\text{C}$ Calibrated $0 \text{ to } 50 \,^{\circ}\text{C}$ Accuracy $^{+}$ $\pm 0.1 \,^{\circ}\text{C}$ Resolution $0.01 \,^{\circ}\text{C}$


⁺ typical



t +61 2 9894 4511



Actual size

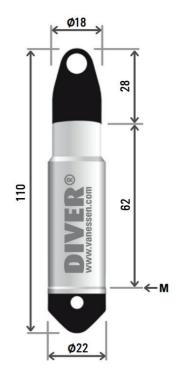

M = membrane Dimensions in mm

e sales@aqualab.com.au

w www.aqualab.com.au